

# Textile Industry

- Reactive hot melts
- Thermoplastic hot melts
- Pressure-sensitive hot melts
- Dispersions



**Jowatherm-Reaktant<sup>®</sup>**  
**Jowatherm-Reaktant<sup>®</sup> PUR Tex**  
**Jowatherm<sup>®</sup>**  
**Jowat-Toptherm<sup>®</sup>**  
**Jowacoll<sup>®</sup>**  
**Jowapur<sup>®</sup>**

# Jowat adhesives in the textile industry



Wherever adhesives are used to manufacture textiles, Jowat is the right partner: We offer a wide range of innovative products to our customers, for the most diverse requirements. For applications in the textile industry - above all for lamination and coating processes - thermoplastic and reactive hot melt, dispersion and solvent-based adhesives have been developed and are used successfully.

The moisture-curing polyurethane hot melt adhesives support even the highest requirements a bondline has to meet. The wide adhesive spectrum, the high strength of adhesion even when grammages are minimal, and the low processing temperature, plus high levels of resistance, for instance in washing and sterilisation processes - all these are characteristic for this group of products. All PUR hot melts offered by Jowat for the garment industry meet the high demands of the "Oeko-Tex Standard 100" for extremely low emission risks in textiles and have the respective certification.

The thermoplastic hot melt adhesives are usually tailored to comply with specific requirements of an individual application. Any lamination must match the special quality demands made on the end use of the product. These product characteristics are targeted already during the adhesive development. Whether adhesion to the substrates, or specific properties that support some characteristics of the product like flame retardancy, breathability, sterilisation stability, or just high mechanical strength - the possibilities for a specific formulation are manifold.

Dispersion adhesives are also successfully used with appropriate application equipment. A very broad spectrum of raw materials available allows the manufacture of tailored adhesives to match all requirements.


The diverse areas of application, from the garment industry to technical textiles, show the important role of adhesives for the end product.



## Clothtech

### Garments - Clothtech

The term Clothtech covers a wide variety of textiles for clothing. These always require bonding when multiply compounds are assembled. Starting with laminating processes for very fine lingerie textiles, to functional outdoor textiles or protective clothing. The applications for sports and professional clothing are very similar.

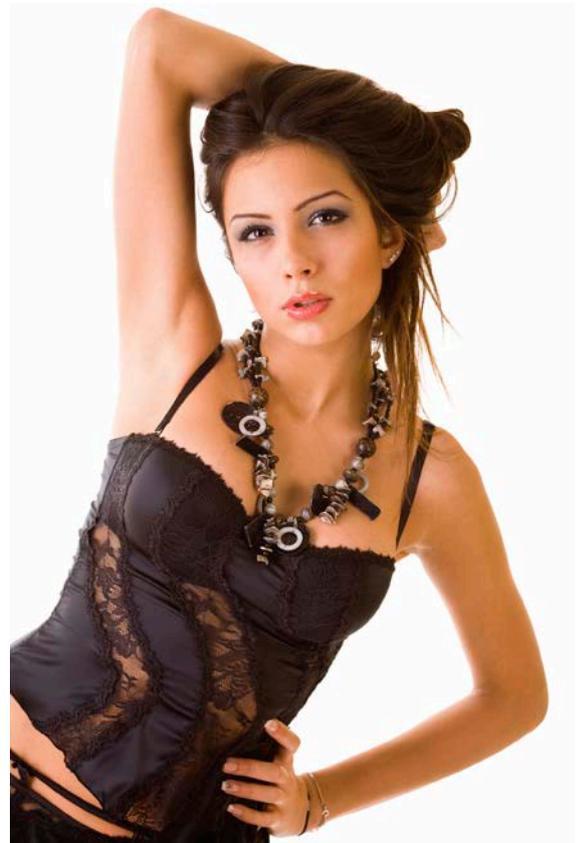

## Medtech

### Membrane lamination - Medtech

This topic covers the applications above and also lamination for medical and hygiene wovens, which may be surgical drapes or incontinence articles. These demand high levels of resistance to washing and sterilisation, achieved when bonding with Jowatherm-Reaktant® products.



## Homotech

### Cover materials – Homotech

Are you sitting or lying down as well as you could? Cover materials for furniture and mattresses are exposed to enormous stress in daily use. The resistance and durability of these fabrics which may have very fine structures can be improved when the undersides are reinforced by lamination or coating using a Jowatherm® product.



## Buildtech

### Textiles for building - Buildtech


In the building technology, technical textiles also have to provide certain functions like tight seals, vapour barriers and absorbency of mechanical stress. The physical structural properties determine the ambient climate and can only be guaranteed by a secure compound of multiply textiles with suitable adhesives.



## Indutech

### Industrial applications - Indutech

Technical textiles are used for a variety of industrial applications - for lamination of emery paper, or the assembly of multilayer filter materials. Jowat® adhesives support the properties of the product and at the same time make the manufacturing process highly efficient.

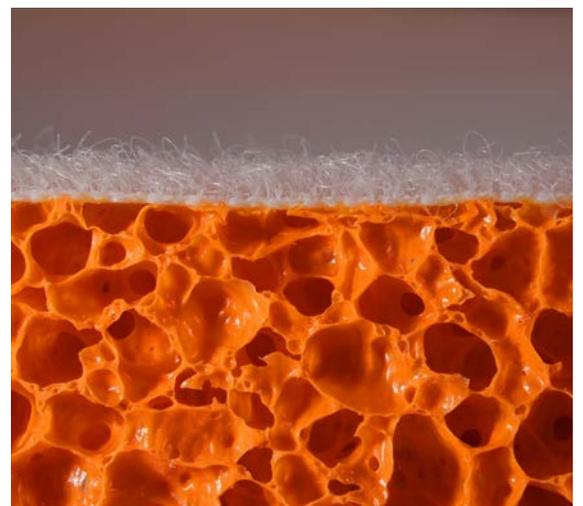

## Homotech

### Cleaning textiles – Homotech

For scrub pads, cleaning rags or mops - Jowat® adhesives are part of our daily lives.

## Coating Systems

The five coating systems outlined below are suitable for application of hot melt adhesives. They have the following characteristics:

- **Manufacture of double and triple laminates**
- **air-permeable laminates**
- **good textile feel of the laminates**




**1 Wide slot nozzle coating system:**

- closed application system (no contact with oxygen and moisture)
- high line speeds
- above all for full surface coatings
- open coating structure (O.C.S.) possible




**2 Gravure roller coating system:**

- accurately defined adhesive pattern
- transfer of adhesive only in the contact area
- open coating structure (O.C.S.) clean application



**3 Spray nozzle coating system:**

- closed application system (no contact with oxygen and moisture)
- high line speeds
- open coating structure (O.C.S.)




**4 Multiple roller coating system:**

- highly flexible - simple changes of adhesive
- especially for full surface coating
- open coating structure (O.C.S.) possible



**5 Screen print coating system:**

- accurately defined adhesive pattern
- transfer of adhesive only in the contact area
- open coating structure (O.C.S.) clean application



## Adhesive programme reactive hot melts

Depending on the application, purpose and processing technology, a variety of PUR hot melt adhesives are used. Jowat adhesives are successfully in use for many applications around the globe.

### Jowatherm-Reaktant®

For textile lamination in the garment industry.

Product	Characteristics	Viscosity
630.80	Foam / Textile, Textile / Textile, high initial strength	approx. 8,000 mPas at 140 °C
637.10	Foam / Membrane, Textile / Textile, high washing resistance	approx. 14,000 mPas at 100 °C
639.00	Superior adhesion, also PTFE membranes	approx. 8,000 mPas at 110 °C
630.20	Foam / Textile, Textile / Textile, high initial strength	approx. 10,000 mPas at 110 °C



### Jowatherm-Reaktant® PUR Tex

For membrane lamination in the garment industry.

Product	Characteristics	Viscosity
633.30	breathable adhesive, also PTFE membranes	approx. 8,000 mPas at 100 °C



### Jowatherm-Reaktant®

For textile lamination in the automotive industry.

Product	Characteristics	Viscosity
630.80	Foam / Textile Textile / Textile high UV stability	approx. 8,000 mPas at 140 °C
630.20	Foam / Textile Textile / Textile high UV stability	ca. 10.000 mPas bei 110 °C

### Jowatherm-Reaktant®

For laminating emery paper.

Product	Characteristics	Viscosity
634.17	Superior initial strength, good adhesion to resinated papers	approx. 20,000 mPas at 140 °C



## Adhesive programme thermoplastic hot melts

Whether for mattresses, furniture or roofing liners: Thermoplastic hot melt adhesives made by Jowat meet the specific requirements of the individual application. Not only for direct lamination and precoating for subsequent bonding, but also for reverse coating to reinforce the fabrics.

### Jowatherm® EVA-Hotmelts

For precoating and lamination of textiles  
e.g. in the shoe industry.



Product	Characteristics	Viscosity
299.35	high hot tack, no blocking	approx. 17,000 mPas at 180 °C
299.75	high hot tack, no blocking, transparent	approx. 45,000 mPas at 180 °C

### Jowat-Toptherm® PO-Hotmelts

For lamination and coating of furniture and  
mattress cover fabrics.

Product	Characteristics	Viscosity
239.70	high hot tack, no blocking, transparent	approx. 8,000 mPas at 180 °C



### Jowat-Hightherm® PO-Hotmelts

For fleece lamination to foils.

Product	Characteristics	Viscosity
230.45	high heat resistance, elastic, long open time, used for roofing liners	approx. 14,000 mPas at 180 °C
263.99	high heat resistance, elastic, long open time, corresponds to FDA guide- line 176.10	approx. 7,000 mPas at 180 °C



## Adhesive programme pressure-sensitive hot melts

The application of pressure-sensitive hot melt adhesives to textiles and insulating materials is always a major technical challenge when high level of resistance to shear and peel are required. Jowat provides adhesives which match the high demands in the automotive industry.

### Jowatherm®

For precoating and self-adhesive properties.

Product	Charactristics	Viscosity
245.00	good permanent tack, high peel strenght	approx. 18,000 mPas at 160 °C
244.80	superior heat resistance, automotive applications	approx. 25,000 mPas at 180 °C



## Adhesive programme dispersions

Apart from processes relying on hot melt technologies, the dispersions are another adhesive system of major importance for textile production. Depending on the requirement and the application, a variety of different adhesive technologies is used.

### Jowacoll®/Jowapur®


For lamination of reel material

Product	Charactristics	Viscosity/Solid content
Jowacoll® 102.75	for lamination in thermo-reactive processes at 180 °C	approx. 18,000 mPas approx. 51 % solid content
Jowacoll® 148.02	for lamination of textile cover materials on panel substrates	approx. 23,000 mPas approx. 70 % solid content
Jowapur® 157.07	contact dispersion for application to both bonding partners	approx. 7,600 mPas approx. 41 % solid content



Note: The products listed only represent a limited selection of the available product portfolio. Our service and consultation team from Sales and Product Marketing will be pleased to provide specific information, to select the most suitable product for your process.

**Jowat | Ihr Partner in Sachen Kleben**  
**Jowat | Your Partner in bonding**

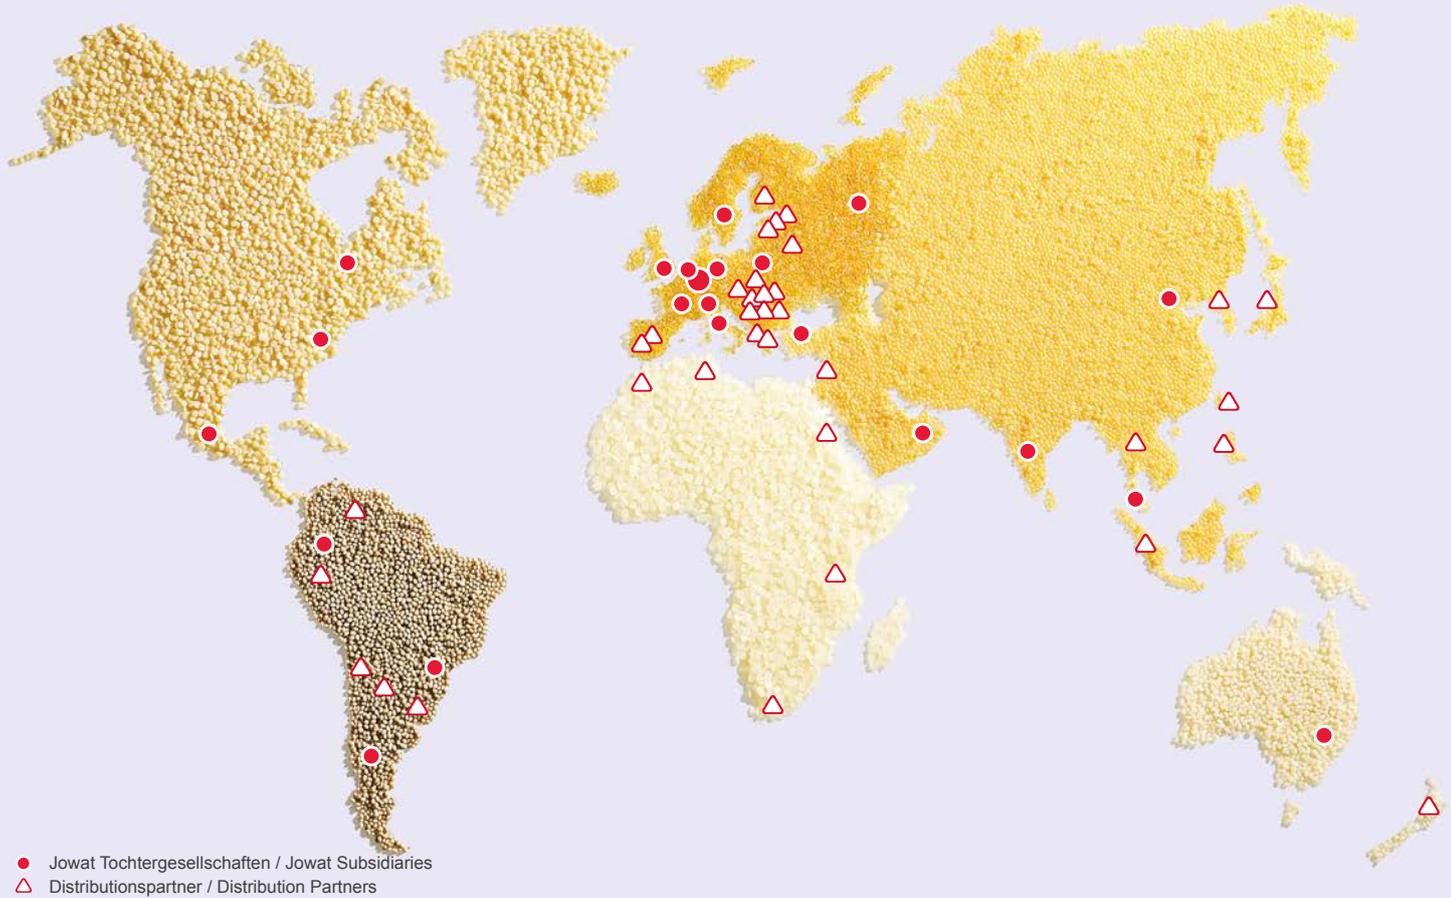

**Jowat – Kleben erster Klasse**  
**Jowat – first class bonding**

**Jowat**   
Klebstoffe

**Jowat SE**  
Ernst-Hilker-Straße 10-14  
32758 Detmold  
Telefon +49 (0)5231 749-0  
info@jowat.de · www.jowat.de

Australia Brasil Canada Chile 中国 Colombia Deutschland France भारत गणराज्य Italia Malaysia Mexico  
Nederland Polska Россия Sverige Suisse Türkiye United Kingdom United States of America ددحتملا تيبرعل تاراملإا